

HOMOGENEOUS

GRABO Fortis

HIGH PERFORMANCE, NON-DIRECTIONAL
HOMOGENEOUS FLOOR COVERING

PERFORMANCE, FEATURES & BENEFITS

Excellent abrasion resistance | Unique non-directional design
Low residual indentation | Easy cleaning and maintenance thanks
to iGuard PUR Surface | Anti-bacterial | Antistatic

BEST
DIMENSIONAL
STABILITY
ON THE
MARKET


RECOMMENDED USAGE

- > Healthcare
- > Education
- > Offices
- > Other public areas

CONSTRUCTION

iGuard PUR Surface

Non-directional
homogeneous layer

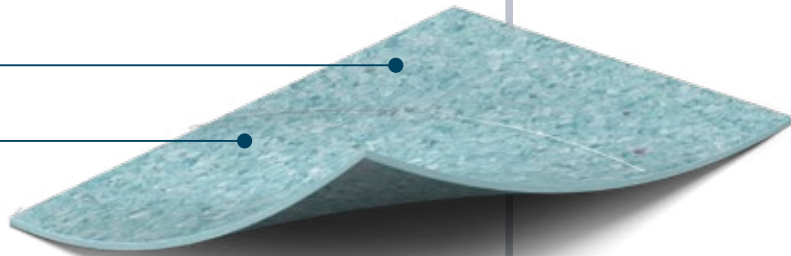

SPECIFICATIONS

DESCRIPTION

Construction	homogeneous	
Binder content	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	2.0 mm
Wear layer thickness	EN ISO 24340	2.0 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,8 kg/m²

CLASSIFICATION

European classification	EN 685	class: 34/43
-------------------------	--------	--------------

PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0.2 %
	EN ISO 23999	average 0.1 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	EN 13893	class: DS
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Hygiene	bacterial resistant	
Seaming method	hot or cold welding	
Warranty	10 year	



2.0
mm

TOTAL THICKNESS

2.8
kg/m²

TOTAL WEIGHT

average
0.1
%

DIMENSIONAL STABILITY

34 43

EUROPEAN
CLASSIFICATION




FORTIS

HOMOGENEOUS


Fortis




SAND

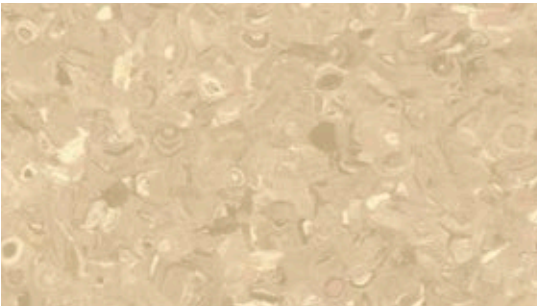


TOBACCO

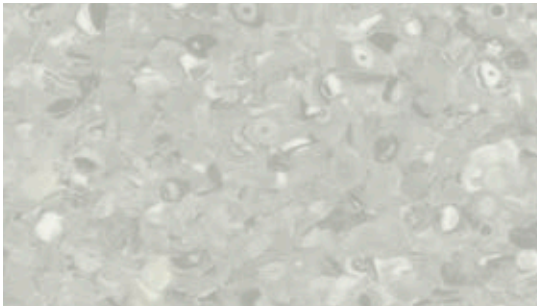


BONE

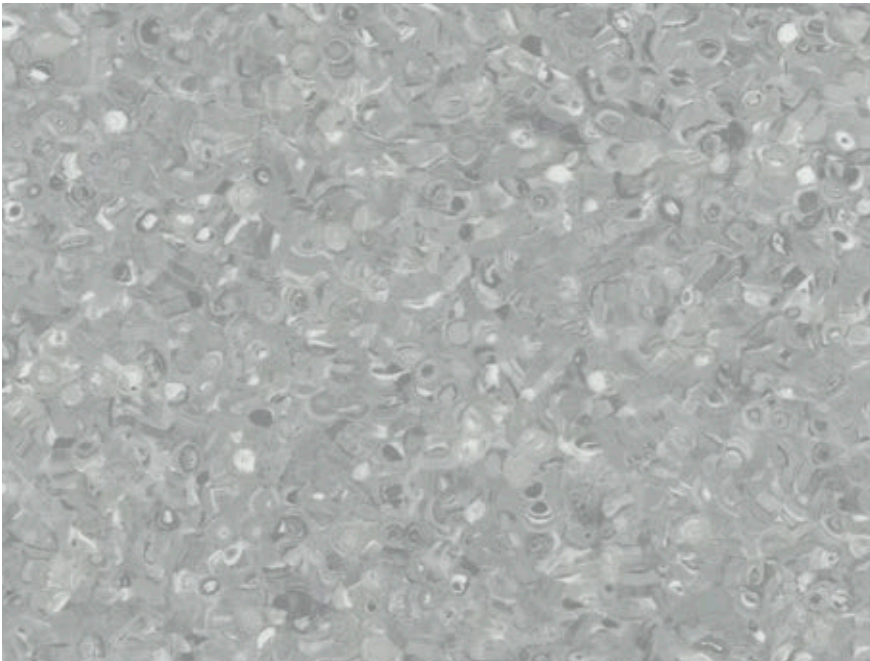


STEEL

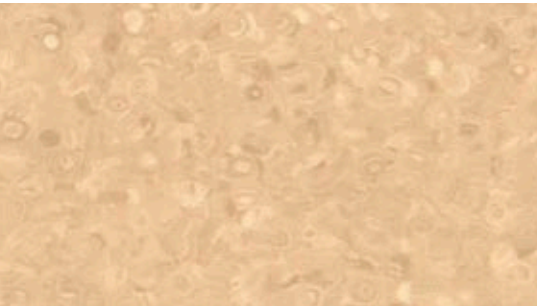


CARAMEL

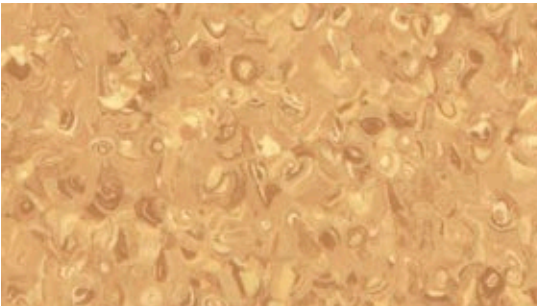


KORK

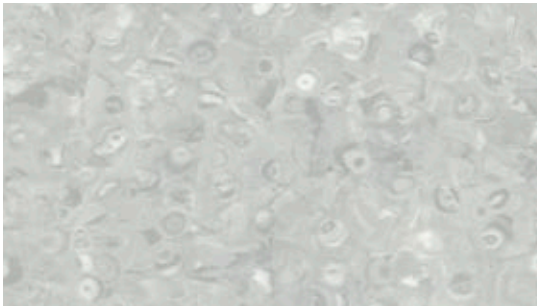


FOG

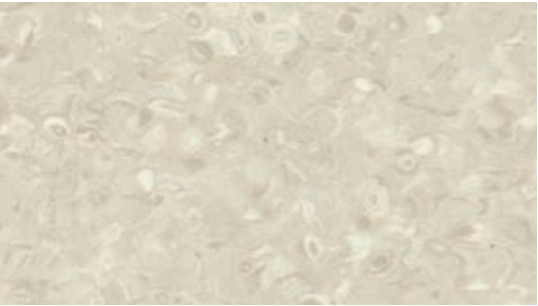


SILVER

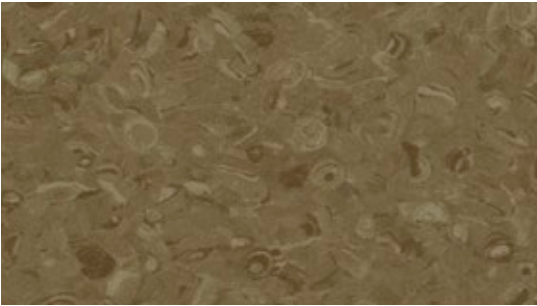

MOCCA

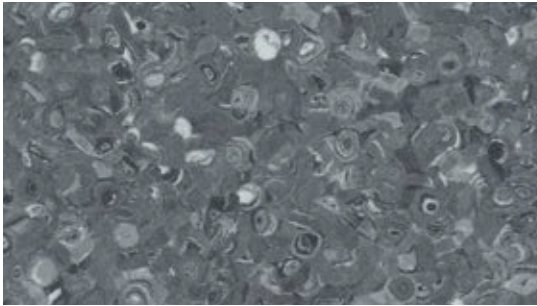

ANTHRACITE

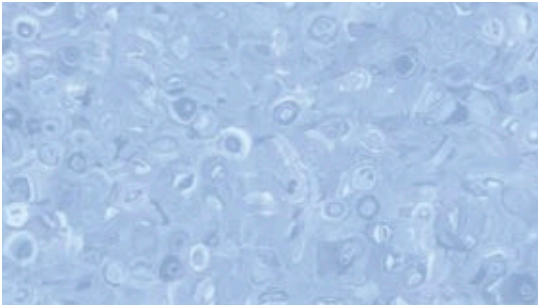


AQUA




CANARI




GOLD

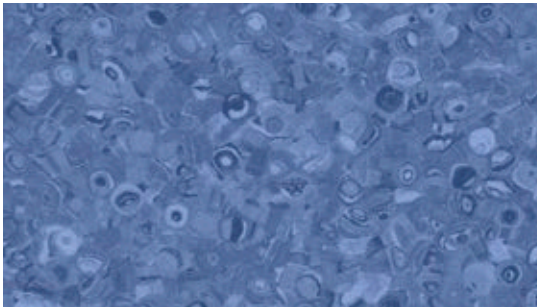


INDIGO

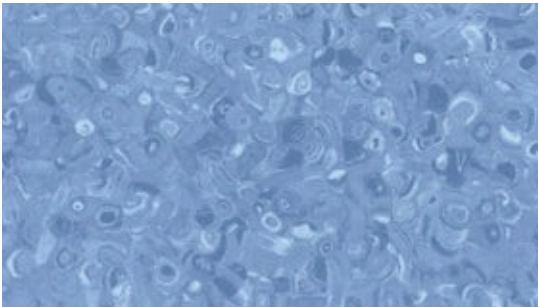


COBALT

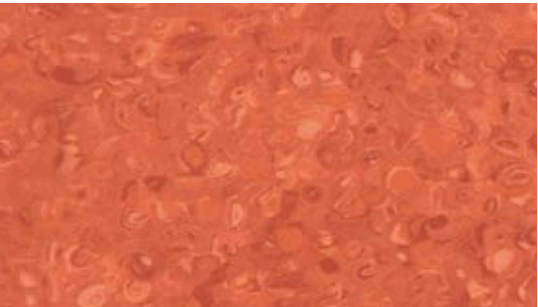

CORAL

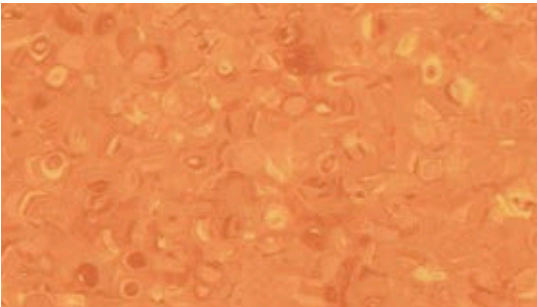

ORANGE

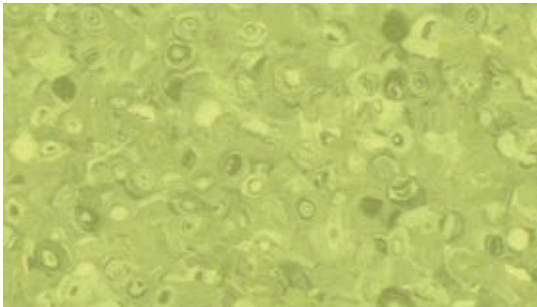

KIWI



CACTUS

FORTIS

HOMOGENEOUS

GRABO Fortis 1.5

COST-EFFICIENT, NON-DIRECTIONAL
HOMOGENEOUS FLOOR COVERING

BEST
DIMENSIONAL
STABILITY
ON THE
MARKET

RECOMMENDED USAGE

- > Education
- > Healthcare
- > Offices
- > Other public areas


PERFORMANCE, FEATURES & BENEFITS

Good value for money | Unique non-directional design
Low residual indentation | Easy cleaning and maintenance thanks
to iGuard PUR Surface | Anti-bacterial | Antistatic

CONSTRUCTION

iGuard PUR Surface

Non-directional
homogeneous layer

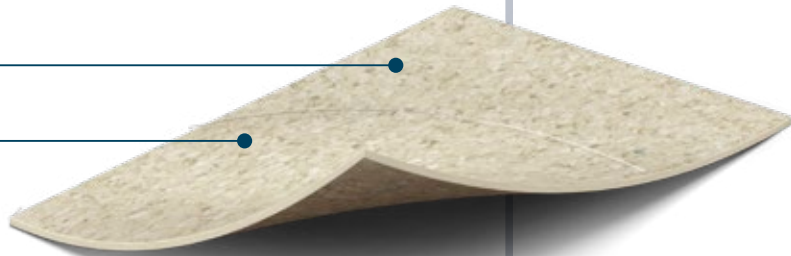

SPECIFICATIONS

DESCRIPTION


Construction	homogeneous	
Binder content	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	1.5 mm
Wear layer thickness	EN ISO 24340	1.5 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,1 kg/m ²

CLASSIFICATION


European classification	EN 685	class: 32/41
-------------------------	--------	--------------

PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0.2 %
	EN ISO 23999	average 0.1 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	EN 13893	class: DS
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Hygiene		bacterial resistant
Seaming method		hot or cold welding
Warranty		7 year

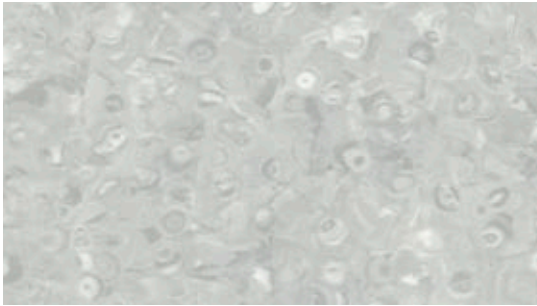

FOG

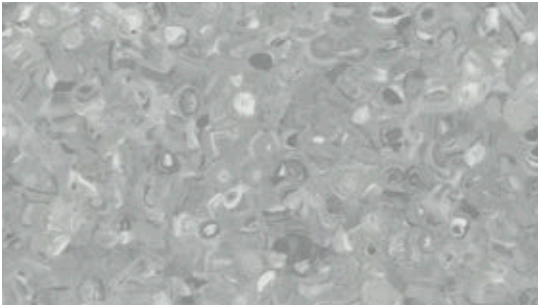

STEEL



SILVER

Fortis 1.5 is available
in all additional Fortis color
with the minimum quantity
of 4000 sqm.

FORTIS 1.5

1.5
mm

TOTAL THICKNESS

2.1
kg/m²

TOTAL WEIGHT

average
0.1
%

DIMENSIONAL STABILITY

32 41

EUROPEAN
CLASSIFICATION