

GRABO Muravyl

HIGH PERFORMANCE FLEXIBLE WALL COVERING


RECOMMENDED USAGE

- > Education
- > Healthcare
- > Retail
- > Hospitality
- > Offices

PERFORMANCE, FEATURES & BENEFITS

2 m width | Excellent fire resistance | Dimensionally stable
Anti-bacterial | Antistatic

CONSTRUCTION

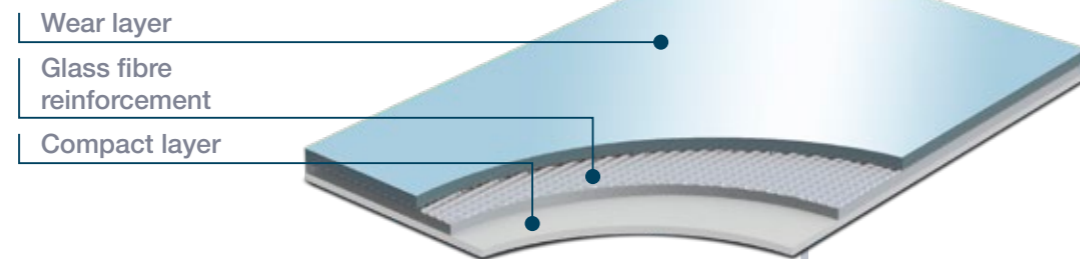

SPECIFICATIONS

DESCRIPTION

Construction	compact heterogeneous	
Total thickness	EN ISO 24346	1,5 mm
Wear layer thickness	EN ISO 24340	0,5 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	25 lm
Total weight	EN ISO 23997	1,4 kg/m ²

CLASSIFICATION

Product specification	EN 649	✓
Residual indentation	EN 433	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Light fastness	EN ISO 105-B02	grade 6

PERFORMANCE

Abrasion group	MSZ EN 660-1	T
Fire resistance	EN 13501-1	class: B-s2, d0
Chemical resistance	EN ISO 26987	✓
Anti bacterial and fungicid treatment	graboSAN	
Seaming method	EN ISO846:1999	heat or cold weld



1.5 mm

TOTAL THICKNESS

1.4 kg/m²

TOTAL WEIGHT

2 m

WIDTH OF ROLLS



MURAVYL