

## Observe

Collection

**Art + Science**

Style Number

**4566V**

Construction

**Heavy Commercial Pvc-Free Ecoworx Resilient**

Finish

**ExoGuard+®**

U.S.

Metric

Nominal Dimensions

**8 in w x 51 in l**

**21 cm w x 129 cm l**

Actual Dimensions

**8.27 in w x 50.79 in l**

**21.01 cm w x 129.01 cm l**

Overall Thickness

**0.098 in**

**2.5 mm**

Edge Profile

**Micro-Bevel**

Installation Type

**Dry Back**

Installation

**Direct Glue**

Recommended Adhesive

**4200 1 Gallon or 4200 4 Gallon**

## Packaging

Pieces per Carton

**16 pcs**

Area per Carton

**46.65 sq ft**

**4.33 sq m**


Weight per Carton

**36.43 lbs**

**16.52 kg**



## Recommended Installation Method

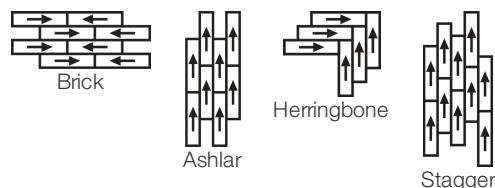

## Coordinating Products

PVC-Free: Pivot, Experiment, Pivot 5.7mm

### Performance + Testing

Static Load (ASTM F970)  
Residual Indentation (ASTM F1914)  
Resistance to Heat (ASTM F1514)  
Resistance to Light (ASTM F1515)  
Resistance to Chemicals (ASTM F925)  
Smoke Density (ASTM E662, Flaming Mode)  
Radiant Panel (ASTM E648)  
Coefficient of Friction (ASTM D2047, Slip Resistance)

**Passes (Modified), \*2500 lbs**

**Passes**

**Passes**

**Passes**

**Passes**

**Passes**

**Passes, Class I**

**>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes**

\*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

### Warranties

[1 Year Commercial Limited Warranty](#)

[25 Year Commercial System Warranty](#)

### Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

### Material Health & Environmental Certifications

#### Health & Wellbeing

Material & Ingredient Transparency

Greenhealth Approved | Yes  
Health Product Declaration (HPD) | 1000 ppm Disclosure  
Declare | LBC Compliant

Indoor Air Quality

Greenguard Gold | Certified

#### Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, And ISO 21930

Embodied Carbon (Cradle to Gate)

6.19 Kg Co<sub>2</sub>/M<sup>2</sup>

Life-Cycle Carbon Emissions

Carbon Neutral

Total Recycled Content

25% (Pre-Consumer 0% | Post-Consumer 25%)

#### Global Product Assessment

\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within The United States And Canada At No Cost to The Customer.

GSA | Approved

Country of Origin | Imported

## Works With WELL | WELL V2 Contribution Credit

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization

X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

X11 Long Term Emissions Control  
Part 2: Flooring Optimization

X14 Material Transparency  
Part 1: Promote Ingredient Disclosure Optimization

**Absence of Asbestos**

**Absence of Heavy Metals**

**Absence of Halogenated Flame Retardants**

**Ortho-Phthalates Free**

**Greenguard Gold Certified**

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**Greenguard Gold Certified**

## Additional Information

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).

\*\*Meets or exceeds all local and national regulations in country of manufacture.

**Installation Guidelines**

**Maintenance Guidelines**

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply  
and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of  
this design in the creation of another product design is also strictly prohibited.

\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse  
suppliers from which to choose. Compared to non-allowable spend which includes  
categories in which we do not have domestic, small or diverse suppliers available to  
meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways



Regenerate 00103  
LRV 33.7 | L\* 64.74  
V2 - Slight Variation



Enliven 00201  
LRV 49.9 | L\* 75.98  
V2 - Slight Variation



Leaf 00375  
LRV 27.7 | L\* 59.64  
V3 - Moderate Variation



Beyond 00450  
LRV 12.9 | L\* 42.68  
V3 - Moderate Variation




Engage 00475  
LRV 21.7 | L\* 53.68  
V3 - Moderate Variation



Stand Out 00486  
LRV 20.2 | L\* 52.06  
V3 - Moderate Variation




Edition 00516  
LRV 24.5 | L\* 56.61  
V2 - Slight Variation



Divert 00520  
LRV 39.9 | L\* 69.42  
V2 - Slight Variation



Outlook 00535  
LRV 18.8 | L\* 50.48  
V2 - Slight Variation



Muse 00585  
LRV 16.4 | L\* 47.49  
V2 - Slight Variation



Sustain 00595  
LRV 24.8 | L\* 56.89  
V3 - Moderate Variation



Spark 00855  
LRV 23.7 | L\* 55.82  
V2 - Slight Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.



Uniform Appearance



Slight Variation



Moderate Variation



Substantial Variation



**Declare**



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +52 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2026 Shaw Industries Group, Inc., a Berkshire Hathaway Company  
January 7, 2026

4 of 4